TESY
It's impressive

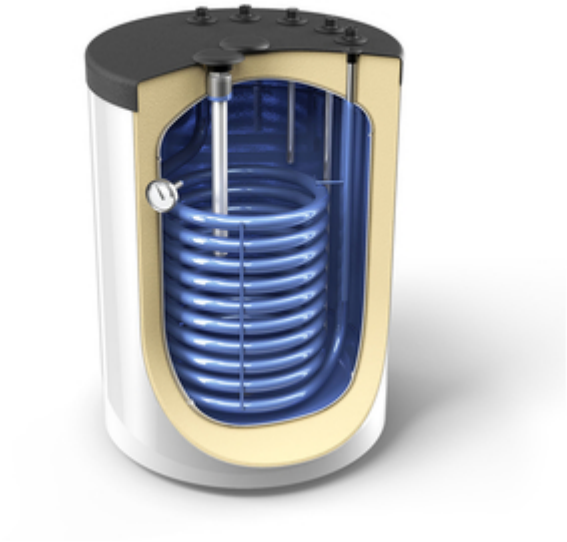

DOMESTIC HOT WATER TANKS FOR INSTALLATION UNDER WALL-HUNG BOILERS

EV 15S 160 60 Z PS

TIN Code	305077
Range	150
Net weight	63 kg
Insulation	PU 50 mm
Heat exchanger surface S1	1.52 m²
Heat exchanger capacity S1	9.5 L
Heat losses ΔT 45K	46 W
Energy class	B
Maximum operational temperature	95 °C
Maximum operational temperature of the heat exchanger	110 °C
Rated pressure of the water tank	8 bar
Rated pressure of the heat exchanger	6 bar
V40 - hot water delivered with a temperature of at least 40 (S1)	231 L

Diameter	600 mm

Information

EV 15S 160 60 Z PS

- Compact overall dimensions, suitable for installation under wall-hung boilers, such as gas, electric or other.
- Convenient placement of the outlets in a semicircle above the top cover for installation under a gas boiler.
- Possibility to work with a plug-and-play electric heating element (3 kW) as a back up.
- CFC free PU foam INSULATION for optimal heat losses for models up to 500 L.
- Drainage outlet.
- Powerful heat exchanger.
- Energy efficient appliance in compliance with the European regulations.

Serie information

EV 15S 160 60 Z PS

Floor-standing indirectly heated water tanks with compact external dimensions, increased surface of the internal heat exchanger and conveniently located sockets for easy connection.
The range includes models with 120 L and 160 L of capacity with a heat exchanger.

Advantages:

- Compact overall dimensions, suitable for installation under wall-hung boilers, such as gas, electric or other.
- Convenient placement of the outlets in a semicircle above the top cover for installation under a gas boiler.
- Possibility to work with a plug-and-play electric heating element (3 kW) as a back up.
- CFC free PU foam INSULATION for optimal heat losses for models up to 500 L.
- Drainage outlet.
- Powerful heat exchanger.
- Energy efficient appliance in compliance with the European regulations (Class A for 120 L model).

*All pictures shown are for illustration purpose only. Actual product may vary due to product enhancement.

The weights indicated in this website are net values for reference purposes only. Actual product weights may vary due to production tolerances.