




BILIGHT HORIZONTAL

GCH 120 44 30 B12 TSR

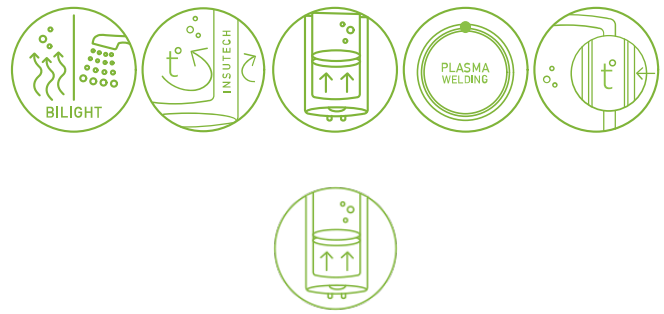

Model	BiLight 120 H
Real Volume	120 L
Height	0.440 m
Width	1.160 m
Rated power	3000 W
Depth	0.467 m
Mounting	Horizontal
Heating time Δt 45K (15 - 60°C)	2:05 h:min
Annual consumption of electricity AEC	2762 kWh
Energy class	C
Diameter	440 mm
Load profile	L
V40	181 L
T _{out of the box}	60 °C
MAX40	213 L





BiLight horizontal models* are equipped with the NEW PISTON inlet nozzle: REVOLUTIONARY SOLUTION FOR MORE HOT WATER

It provides up to 40%** more hot water for TESY BiLight horizontal models, compared to TESY BiLight horizontal models with previous PISTON nozzle.

With the NEW PISTON inlet nozzle a horizontal TESY water heater delivers a comparable quantity of hot water as a vertical one.

- INSUTECH - an in-house TESY technology for highly efficient insulation and extremely low heat losses
- Bi light indication for easy and fast recognition of the work modes
- Electric on/off switch
- Freeze protection
- Glass-ceramic coating for corrosion protection
- Plasma-arc welding of the water tank for extended useful life

*BiLight horizontal 50 l is not with the NEW PISTON

** For TESY BiLight horizontal models with NEW PISTON nozzle, compared to TESY BiLight horizontal models with previous PISTON nozzle