


BILIGHT HORIZONTAL WITH HEAT EXCHANGERS

GCHS 80 44 40 B11 T



Model	BiLight 80 HS
Real Volume	81 L
Rated power	4000 W
Heating time Δt 45K (15 - 60°C)**80°C	0:54 h:min
Energy class	C
Height	0.440 m
Width	0.855 m
Depth	0.467 m
Diameter	440 mm
Thermo pocket	no
Mounting	Horizontal
Heat exchanger surface	0.21 m ²
Heat exchanger capacity	0.9 L
Continuous flow rate of DHW at ΔT 35°C *60-80°C	70 L/h

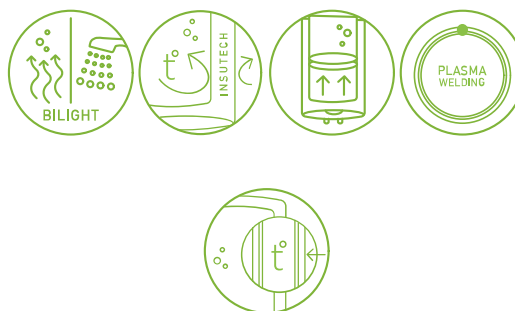

Exchange power in continuous mode (max. coil output) *60-80°C	2.9 kW
Standing losses	59 W