




MODECO CERAMIC WITH A HEAT EXCHANGER

GCV6S 80 47 24D C21  
TS2RCP

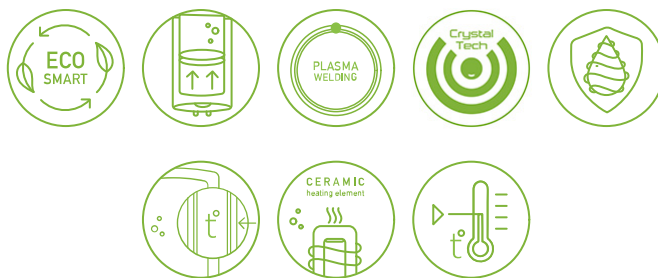

|   |                     |
|---|---------------------|
| Model   | ModEco Ceramic 80 S |
| Real Volume   | 79 L                |
| Rated power   | 2400 W              |
| Energy class  | B                   |
| Diameter  | 470 mm              |
| Heating time $\Delta t$ 45K (15 - 60°C)**80°C                 | 0:18 h:min          |
| Height  | 0.845 m             |
| Width   | 0.470 m             |
| Depth   | 0.496 m             |
| Thermo pocket   | x1 pieces           |
| Heat exchanger surface  | 0.45 m <sup>2</sup> |
| Heat exchanger capacity                                       | 2.1 L               |
| Continuous flow rate of DHW at $\Delta T$ 35°C *60-80°C       | 329 L/h             |
| Exchange power in continuous mode (max. coil output) *60-80°C | 13.8 kW             |



Standing losses

42 W